





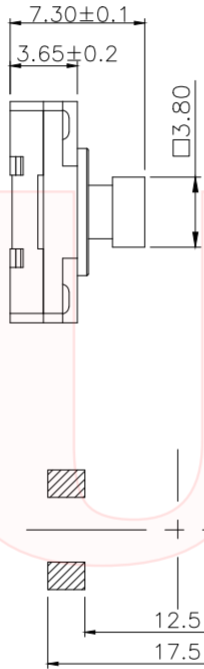

DIMENSIONS

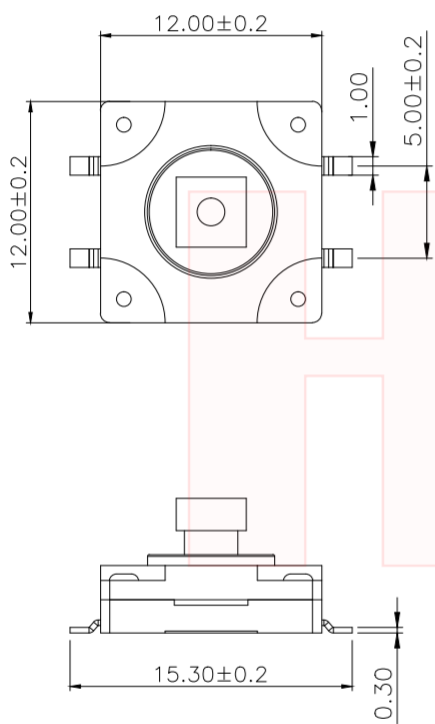

Circuit Diagram

PCB Layout(Pattern side)

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Insulation Resistance	100MΩ<DC 500V / 1 min> Min.	
Withstanding Voltage	250 VAC / min.	
Travel	0.25 ± 0.1mm	
Operating Force	160±50gf	250±50gf
Operating Life(cycles)	100,000	

REV	REVISION RECORD	DATE		TOLERANCES		DR	KEN	PART NO.:
A0	NEW		SCALE: 1:1	LINEAR	ANGLES	CHKD	FRDS	
			UNITS:mm	.X ±0.20	X. ±2°	APPD	ANGEL	TS-1841ST
			SIZE:A4	.XX ±0.10		WEB	WWW.HUATN.COM	
			SHEET: 1/1	.XXX ±0.03				TACT SWITCH



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HUATN ELECTRONICS CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HUATN ELECTRONICS CO.,LTD.