





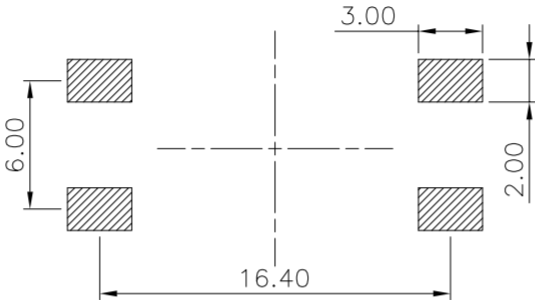


DIMENSIONS

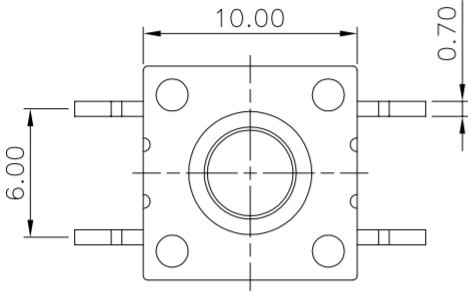

Circuit Diagram

PCB Layout(Pattern side)

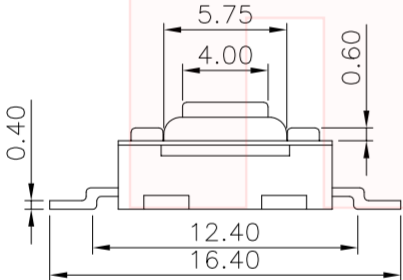

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Insulation Resistance	100MΩ<DC 500V / 1 min> Min.	
Withstanding Voltage	250 VAC / min.	
Travel	0.25 ± 0.1mm	
Operating Force	160±50gf	250±50gf
Operating Life(cycles)	100,000	

REV	REVISION RECORD	DATE		TOLERANCES		DR	KEN	PART NO.:
A0	NEW		SCALE: 1:1	LINEAR	ANGLES	CHKD	FRDS	TS-1842SP
			UNITS:mm	.X ±0.20	X. ±2°			
			SIZE:A4	.XX ±0.10		APPD	ANGEL	TITLE:
			SHEET: 1/1	.XXX ±0.03		WEB	WWW.HUATN.COM	TACT SWITCH